

OMS51100

Rack Module Low voltage ess


SAFER

RELIABLE

FLEXIBLE

CONVENIENT

ECO-FRIENDLY

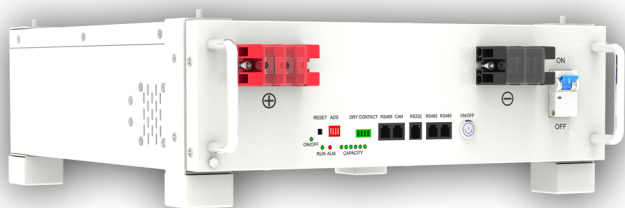

▷ Safer

Cobalt Free Lithium Iron Phosphate (LFP) Battery: Safety and longLifespan, high efficiency and highpower density. Intelligent BMS,providing completeprotection.

▷ Reliable

Support high discharge power. IP20, natural cooling, wide temperaturerange: -20°Cto55°C.

▷ Flexible

Modulardesign, easy to expand,
Suited to residential andcommercial applications for increasing theself-consumptionratio.

▷ Convenient

Battery module auto networking, easymaintenance, support remotely monitoring and upgrade, support USB driveupgrade the firmware.

▷ Eco-Friendly

Use environmental protection materials, the whole module non-toxic,pollution-free.

OMS51100

Model		OMS51100
Main Parameter		
Battery Chemistry		LiFePO4
Capacity (Ah)		100
Scalability		Max 64
Nominal Voltage (V)		51.2
Operating Voltage(V)		43.2~57.6
Nominal Energy (kWh)		5.12
Usable Energy (kWh) [1]		51.2
Charge/Discharge Current (A) [2]	Recommend	50
	Max.	100
	Peak(2mins,25℃)	120
Other Parameter		
Recommend Depth of Discharge		90%
Dimension (W/H/D, mm)		450*133*500
Weight Approximate(kg)		45
Master LED Indicator		5LED(SOC:20%~SOC100%),3LED(working, alarming, protecting)
IP Rating of Enclosure		IP20
Operating Temperature		Charge: 0~55℃ (Optional heating: -20℃~55℃), Discharge: -20℃~55℃
Storage Temperature		0~35℃
Humidity		5%~95%
Altitude		≤2000m
Cycle Life		≥6000(25℃±2℃ ,0.5C/0.5C,90%DOD,70%EOL)
Installation		Wall-Mounted, Floor-Mounted, Rack-Mounted (19-inch standard cabinet, cabinet depth ≥600mm)
Communication Port		CAN2.0, RS485
Warranty Period [3]		5 years
Energy Throughput		16MWh@70%EOL
Certification		UN38.3, IEC, CE,MSDS

[1] DC Usable Energy, test conditions: 90% DOD, 0.5C charge & discharge at 25℃ . System usable energy may vary due to system configuration parameters.

[2] The current is affected by temperature and SOC.

[3] Conditions apply, refer to Deye Warranty Letter.

Introduction

This series lithium iron phosphate battery is one of new energy storage products developed and produced by , it can be used to support reliable power for various types of equipment and systems.

This series is especially suitable for application scene of high power, limited installation space, restricted load-bearing and long cycle life.

This series has built-in BMS battery management system, which can manage and monitor cells information including voltage, current and temperature. What's more, BMS can balance cells charging to extend cycle life. Multiple batteries can connect in parallel for larger capacity and longer power supporting.